



Single Head InkJet Coding Printers

Smooth, Reliable Coding and Ultra-Long Working Time

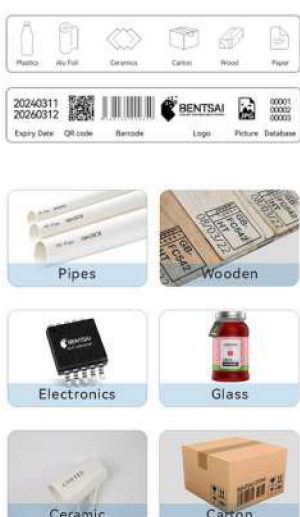

**Handheld 25.4 mm
6210B & 6210BL**

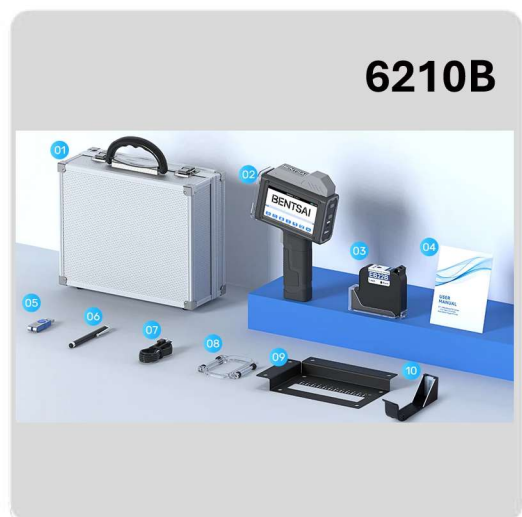

Product Model	6210B Handheld (25.4 mm), 6210BL Online-Handheld (25.4 mm)
Printing Technology	Thermal Inkjet (TIJ)
Ink Throw Distance	2-5mm(Distance between nozzle plate and print object)
Print Height	2.5 mm - 25.4 mm (1-10 lines)
Optional Ink Cartridges	Water based (42ml*1): Black,Cyan,Magenta,Yellow Solvent Based (42ml*1): Black,Cyan,Magenta,Yellow, Green
Operation System	FreeRTOS system
System Language	Chinese/English/German/Arabic/Spanish/Russian/Japanese/Korean/Italian/ Portuguese/French/Hindi/Thai/Vietnamese/Persian/Turkish/Chinese Traditional/ Indonesian/Slovenian/Serbo-Croatian/Czech/Bulgarian/Romanian/Polish/Greek/ Hungarian/Ukrainian/Slovak/Burmese (Avaialbe languages vary for different regions)
Display	4.3" High Definition Touch Screen
Status Alarm	Green: Ready Blue: Printing Red: Alarm
Print Applications	Text, Numbers, Images, Logos, 2D codes, Barcodes, Dates, Counter, Database etc.
Printabel Material	Water based ink for porous and semi porous substrates: Paper/Corrugated box/ Wooden/Fiberboard/Cotton etc. Solvent based ink for semi porous and non porous substrates: Plastic/Glass/Metal plates/Alu-foils/Cables etc.
2D code Type	Code128, Code39, EAN8, EAN13, UPCA, ITF(2of5), UPCE
Barcode Type	DataMatrix, QR
Font Type	True type fonts, Dotmatrix fonts
Resolution	300/600dpi
Print Speed	30m/min(fastest at 300 dpi)
Grey level	1-5
Max. Print Size	25.4 mm
Max. Pixel Size	200px* 4800px
External Ports	Handheld only: USB, Power adapte Handheld and Inline: USB, Power adapter and Photoelectric sensor
Battery	2pcs 18650 lithium ion battery, 2600mAh each.Removable and Replaceble
Standby Time	≥16 hours (working when screen off)
Power Adapter	IN:AC100-240V, OUT: DC5V 2A(B), OUT: DC9V 2A(BL) IN:AC100-240V,OUT: DC5V 2A(6210B), OUT: DC9V 2A(6210BL)
Working Environment	Equipment Storage Temperature: -20°C-55°C Working Temperature: 5°C-35°C (Best: 15°C-35°C) Humidity:10%-80%
Memory Size	128M
Net Weight	410g
Packaging Weight	1750g(Aluminum case)
Product Dimension	208*113*45mm
Packaging Dimension	275*115*250mm



Contech Supply Co.,Ltd.

☎ 02-170-8051

✉ contech@contechsupply.co.th

💻 www.contechsupply.co.th



@contechsupply